


HD

FASCETTE STRINGITUBO HD HEAVY-DUTY HOSE CLAMPS

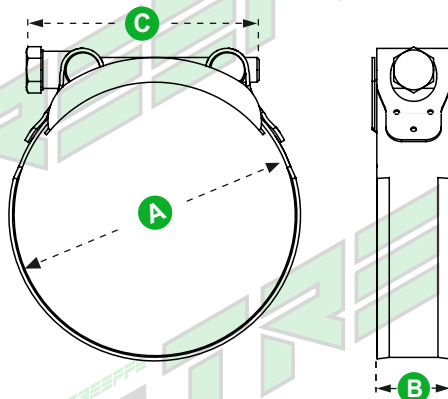

diam. diam.	larg. nastro Band width	Bullone Bolt	coppia di serraggio raccomandata recommended tightening torque
A	B	C	Nm
mm	mm	mm	
26-28	21	M6x50	10,4
29-31	21	M6x50	10,4
32-35	21	M6x50	10,4
36-39	21	M6x50	10,4
40-43	21	M6x50	10,4
44-47	21	M6x50	10,4
48-51	21	M6x60	10,4
52-55	21	M6x60	10,4
56-59	21	M6x60	10,4
60-63	21	M6x60	10,4
64-67	21	M6x55	10,4

diam. diam.	larg. nastro Band width	Bullone Bolt	coppia di serraggio raccomandata recommended tightening torque
A	B	C	Nm
mm	mm	mm	
68-73	24	M8X70	24,6
74-79	24	M8X70	24,6
80-85	24	M8X70	24,6
86-91	24	M8X80	24,6
92-97	24	M8X80	24,6
98-103	24	M8X80	24,6
104-112	24	M8X90	24,6
113-121	24	M8X90	24,6
122-130	24	M8X90	24,6

diam. diam.	larg. nastro Band width	Bullone Bolt	coppia di serraggio raccomandata recommended tightening torque
A	B	C	Nm
mm	mm	mm	
131-139	26	M10X100	50,1
140-148	26	M10X100	50,1
149-161	26	M10X100	50,1
162-174	26	M10X100	50,1
175-187	26	M10X100	50,1
188-200	26	M10X100	50,1
201-213	26	M10X100	50,1
214-226	26	M10X100	50,1
227-239	26	M10X100	50,1
240-252	26	M10X100	50,1

Collari ad altissima prestazione.
Adatti particolarmente per tubazioni
di grosso diametro, molto robuste e
rigide. I bordi rialzati, conferiscono
assoluta sicurezza al tubo.

*High performance bands, compact and
durable. Rolle-up band edges are able to
guarantee total protection to the hose.
Particularly suited for sealing suction
and pressure lines with plastic or steel
reinforcements and high shore hardnesses.
Their distinguishing feature is the extremely
high band tensile force.*

MATERIALE / MATERIAL



W2

Acciaio inossidabile
Stainless steel
AiSi 430

Acciaio zincato
Zinc-plated steel

Descrizioni e caratteristiche tecniche indicative e non impegnative / We reserve the right to change product and specification without prior notice