


CAPPELLI
AIR INLET CAPS
DECKEL

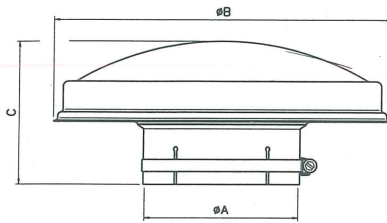



TIPO TYPE TYP	∅ A	∅ B	C	
CP 40	40,2	133	80	P
• CP 48	48	133	80	P
CP 51 M	51,2	112	57	M
CP 51	51,2	133	80	P
• CP 53	53	152	84	P
• CP 54	54	152	84	P
• CP 58	57,2	152	84	P
• CP 60	60,2	152	84	P
CP 63 M	63,7	133	59	M
CP 64	63,7	152	84	P
CP 65	65,7	152	84	P
• CP 68	68	186	100	P
• CP 70	70,2	186	100	P
CP 76 M	76,2	172	77	M
CP 76	76,2	186	100	P
CP 82	82,2	250	107	M
CP 85	85,2	250	107	M

TIPO TYPE TYP	∅ A	∅ B	C	
CP 96	96,2	250	107	M
• CP 101	101,2	250	107	M
CP 102	102,2	250	107	M
CP 106	106,2	250	107	M
CP 110	110,2	250	107	M
CP 114	114,2	250	107	M
• CP 115	115,2	250	107	M
• CP 127	127,2	250	107	M
CP 150	150,2	250	107	M
CP 153	153,2	250	107	M
CP 154	154,2	405	142	M
• CP 179	179,2	405	142	M

• CON RIDUZIONE / WITH REDUCTION / MIT REDUKTION
P PLASTICO / PLASTIC / KUNSTOFF
M METALLICO / METALLIC / METALL

FASCETTE CL
MOUNTING BANDS
ROHRSCHELLEN

Tipo Type Typ	DIMENSIONI / DIMENSIONS / DIMENSIONEN				
	A	B	C	D	E
CL 111	112	65	70	60	M8x1,25
CL 137	137	80	83	20	9
CL 165	165	100	95	22	9
CL 187	187	120	108	25	9
CL 203	203	120	108	25	9
CL 229	229	130	114	32	11,5
CL 260	260	145	127	32	11,5
CL 279	279	155	127	32	11,5
CL 300	300	175	152	32	13
CL 330	330	184	152	38	10
CL 355	355	206	203	38	12
CL 380	381	203	159	38	11

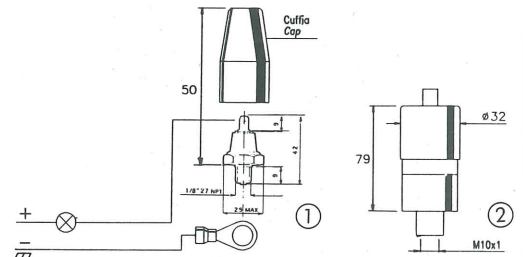

INDIC. INTASAMENTO ELETTRICO ELECTRIC DUST LOAD INDICATOR WARTUNGSSCHALTER	RESTRIZIONE RESTRICTION ÜBERDRUCK		INDIC. INTASAMENTO OTTICO OPTICAL DUST LOAD INDICATOR WARTUNGSANZEIGER
Tipo/Type/Typ ①	mm H ₂ O	m. bar	Tipo/Type/Typ ②
INP007 - 380	380	38	—
INP007 - 500	500	50	INV006 - 500
INP007 - 625	625	62,5	INV006 - 625
INP007 - 760	760	76	—

TIPO TYPE TYP	DIMENSIONI / DIMENSION / DIMENSIONEN			
	∅ A	∅ B	C	D
PR 12190	64	63.5	30	110
PR 12865	76.5	70	25	40
PR 12191	76.5	76	32	110
PR 11099	76.5	76	32	200
PR 11502	88	50	35	70
PR 11501	88	62	35	70
PR 12085	102.5	102	70	530
PR 13487	150	100	35	70

PROLUNGHE
EXTENSIONS
VERLÄNGERUNGEN

