

PARAPIOGGIA SILENZIATI SILENCED RAIN CAPS SCHALLGEDÄMPFTE REGENSCHUTZKAPPE



Il parapioggia silenziato è stato concepito per eliminare il problema del rumore dovuto dallo scuotimento del piattellino sul tubo (in chiusura) e del fermo (inapertura).

Questo parapioggia silenziato è stato progettato per ottenere la massima resistenza meccanica alle sollecitazioni causate dal flusso irregolare del gas di scarico.



È realizzato in acciaio al carbonio con boccole in nylon caricato vetro ed assemblato con rivetti in acciaio inossidabile.

La verniciatura è particolarmente curata per evitare la ruggine, vista la frequente esposizione alle intemperie.

Il parapioggia viene prima sgrassato a bagno con solventi e poi viene eseguita una fosfatazione. Con apposite apparecchiature elettrostatiche si riveste il parapioggia con uno strato uniforme di polvere epossipoliestere (spessore 50-60 micron) che, per successiva cottura a forno, forma un film con elevate caratteristiche meccaniche e di resistenza agli agenti atmosferici. A richiesta viene realizzato in acciaio inossidabile AISI 430.

The silenced rain protection cap has been realized to eliminate the noise problem caused by the shaking of the plate on the tube (while closing) and by the holder (while opening).

This silenced rain cap has been conceived with the aim of achieving the highest mechanical resistance against the stress caused by irregular exhaust gas flow. It is realized in carbon steel with bushings made of fiber glass reinforced nylon and assembled with stainless steel rivets. The painting is done with particular care in order to avoid rust, considering the frequent exposure to bad weather. The rain cap is first degreased in a solvent bath and then a phosphating is carried out. By means of special electrostatic equipments, the rain cap is coated with a uniform layer of epoxy-polyester powder (50/60 micron thickness) which, through a subsequent oven treatment, forms a film with superior mechanical qualities and high resistance against the air and weather influences. On request it can be made in AISI 430 stainless steel.

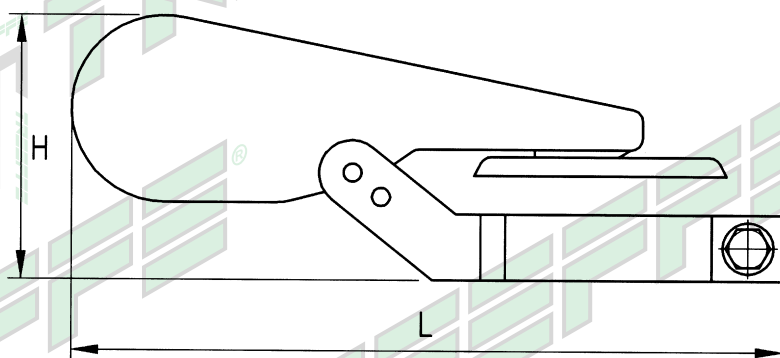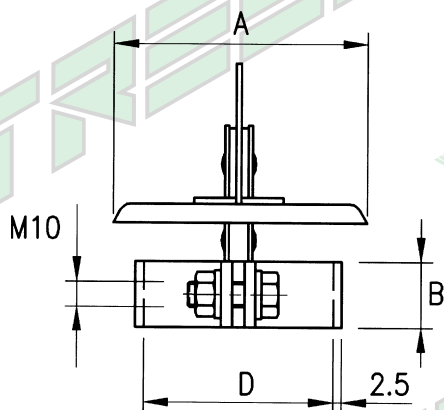

CODICE / CODE / KODE	DIMENSIONI / DIMENSIONS / DIMENSIONEN mm				
	D	A	B	H	L
ECP0000038	38	54	25	82	190
ECP0000040	40	54	25	82	192
ECP0000043	43	54	25	82	195
ECP0000045	45	61	25	82	197
ECP0000048	48	61	25	82	201
ECP0000050	50	61	25	82	201
ECP0000055	55	67	25	82	204
ECP0000060	60	75	25	82	211
ECP0000065	65	75	25	82	217
ECP0000070	70	89	25	82	223
ECP0000075	76	89	25	82	230
ECP0000080	80	94	25	82	233
ECP0000085	89	105	25	87	242
ECP0000090	92	119	25	87	245
ECP0000095	98	119	25	87	253

CODICE / CODE / KODE	DIMENSIONI / DIMENSIONS / DIMENSIONEN mm				
	D	A	B	H	L
ECP0000100	103	119	25	87	257
ECP0000115	114	131	30	87	269
ECP0000120	120	131	30	87	285
ECP0000130	127	150	30	87	285
ECP0000133	133	150	30	87	285
ECP0000140	139	150	30	97	385
ECP0000150	150	185	30	97	405
ECP0000160	160	185	30	97	405
ECP0000170	170	185	30	97	425
ECP0000180	180	219	30	108	440
ECP0000193	193	219	30	108	440
ECP0000200	200	219	30	108	460
ECP0000220	219	240	30	108	455
ECP0000245	245	265	30	108	488
ECP0000255	255	275	30	108	495

Le dimensioni potranno variare senza obbligo di preavviso / Dimensions can change without notice / Dimensionen Können ohne vorherige Benachrichtigung ändern.

Descrizioni e caratteristiche tecniche indicative e non impegnative / We reserve the right to change product and specification without prior notice